

Pb Free Plating Product

F20UP20DS thru F20UP60DS



10 Ampere Dual Series Connection Ultra Fast Recovery Half Bridge Rectifiers

Features

- * Latest GPP technology with super fast recovery time
- * Low forward voltage drop
- * High current capability
- * Low reverse leakage current
- * High surge current capability

Application

- * Automotive Inverters and Solar Inverters
- * Plating Power Supply, SMPS, EPS and UPS
- * Car Audio Amplifiers and Sound Device Systems

Mechanical Data

- * Case: Fully Isolated Molding TO-220F
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solderable per MIL-STD-202 method 208
- * Polarity: As marked on diode body
- * Mounting position: Any
- * Weight: 2.0 gram approximately

ITO-220AB Unit:mm

① → ②
③ → Case
Positive Common Cathode Suffix "DN"

① ← ②
③ ← Case
Negative Common Anode Suffix "DP"

① → ②
③ ← Case
Doubler Tandem Polarity Suffix "DD"

① ← ②
③ ← Case
Series Tandem Polarity Suffix "DS"

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	SYMBOL	F20UP20DS	F20UP40DS	F20UP60DS	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	200	400	600	V
Maximum RMS Voltage	V _{RMS}	140	280	420	V
Maximum DC Blocking Voltage	V _{DC}	200	400	600	V
Maximum Average Forward Rectified Current T _C =100°C	I _{F(AV)}	10.0			A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	100			A
Maximum Instantaneous Forward Voltage @ 5.0 A	V _F	0.98	1.3	1.7	V
Maximum DC Reverse Current @T _J =25°C At Rated DC Blocking Voltage @T _J =125°C	I _R	5.0 100			uA uA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	35			nS
Typical junction Capacitance (Note 2)	C _J	65			pF
Typical Thermal Resistance (Note 3)	R _{θJC}	2.2			°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150			°C

NOTES : (1) Reverse recovery test conditions I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A.
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.
(3) Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

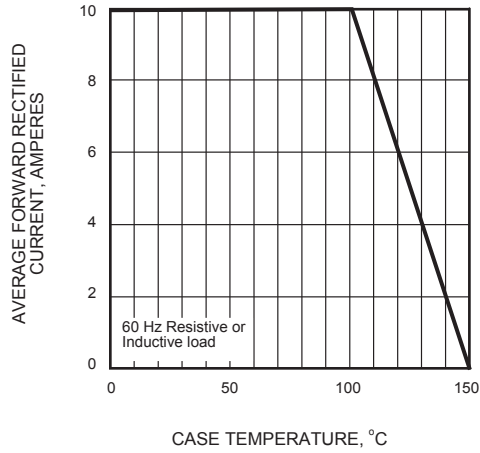


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

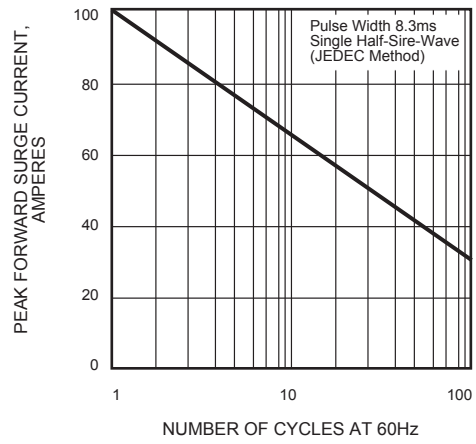


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

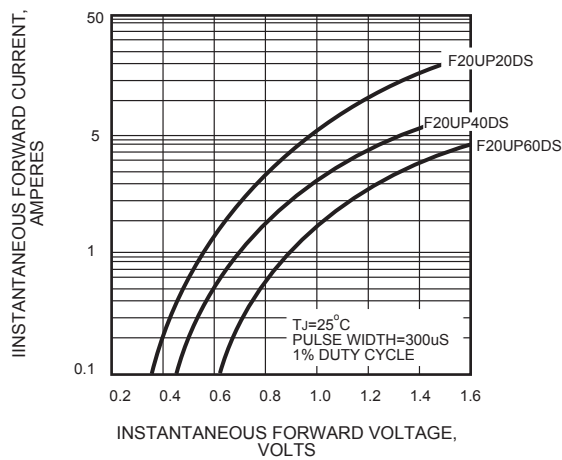


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

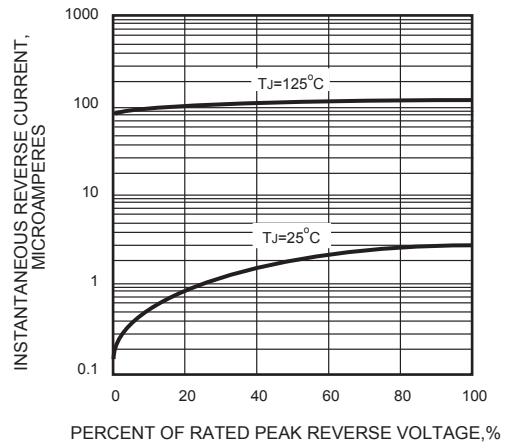


FIG.5 - TYPICAL JUNCTION CAPACITANCE

