

Pb Free Plating Product

MUR2020FCL thru MUR20120FCL



20.0 Ampere Insulated Dual Series Connection Ultra Fast Recovery Rectifiers

<p>Features</p> <ul style="list-style-type: none"> ThinkiSemi latest&matured process FRD/FRED Low forward voltage drop High current capability Low reverse leakage current High surge current capability <p>Application</p> <ul style="list-style-type: none"> Automotive Inverters and Solar Inverters Car Audio Amplifiers and Sound Device Systems Plating Power Supply, Motor Control, UPS and SMPS etc. <p>Mechanical Data</p> <ul style="list-style-type: none"> Case: Isolated fully plastic ITO-220AB/TO-220F-3L package Epoxy: UL 94V-0 rate flame retardant Terminals: Solderable per MIL-STD-202 method 208 Polarity: As marked on diode body Mounting position: Any Weight: 2.0 gram approximately 	<p>ITO-220AB/TO-220F-3L</p> <p>Unit: inch(mm)</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Positive Common Cathode Suffix "FCT"</p> </div> <div style="text-align: center;"> <p>Negative Common Anode Suffix "FCA"</p> </div> <div style="text-align: center;"> <p>Doubler Doubler Polarity Suffix "FCR"</p> </div> <div style="text-align: center;"> <p>Series Series Connection Suffix "FCL"</p> </div> </div>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	MUR2020FCL	MUR2030FCL MUR2040FCL	MUR2060FCL	MUR2080FCL	MUR20100FCL	MUR20120FCL	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	200	400	600	800	1000	1200	V
Maximum RMS Voltage	VRMS	140	280	420	560	700	840	V
Maximum DC Blocking Voltage	VDC	200	400	600	800	1000	1200	V
Maximum Average Forward Rectified Current TC=125°C (Total Device 2x10.0A=20.0A)	IF(AV)	20.0						A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)(Per Diode/Per Leg)	IFSM	200						A
Maximum Instantaneous Forward Voltage @10.0A(Per Diode/Per Leg)	VF (Typical)	0.90-1.10	1.10-1.40	1.40-1.80	1.40-1.80			V
Maximum DC Reverse Current @TJ=25°C At Rated DC Blocking Voltage @TJ=125°C	IR	5.0 500						µA µA
Maximum Reverse Recovery Time (Note1)	Trr	35-50			50-75			nS
Typical Junction Capacitance (Note 2)	CJ	100						pF
Typical Thermal Resistance (Note 3)	RθJC	3.0						°C/W
Operating Junction and Storage Temperature Range	TJ,TSTG	-55 to +175						°C

Note:(1)Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.
Note:(2)Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.
Note:(3)Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

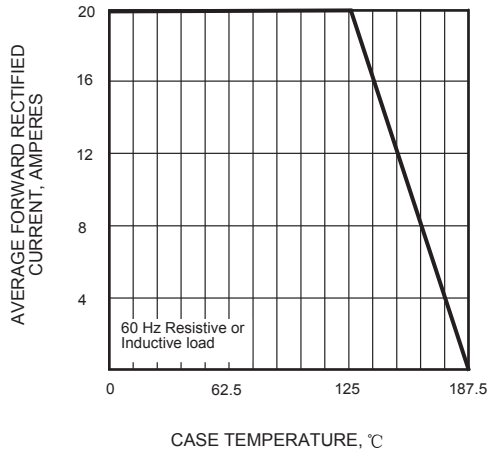


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

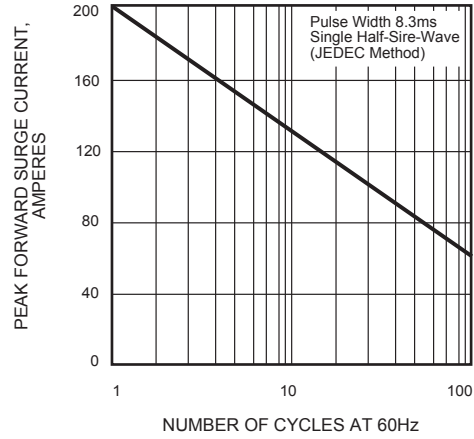


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

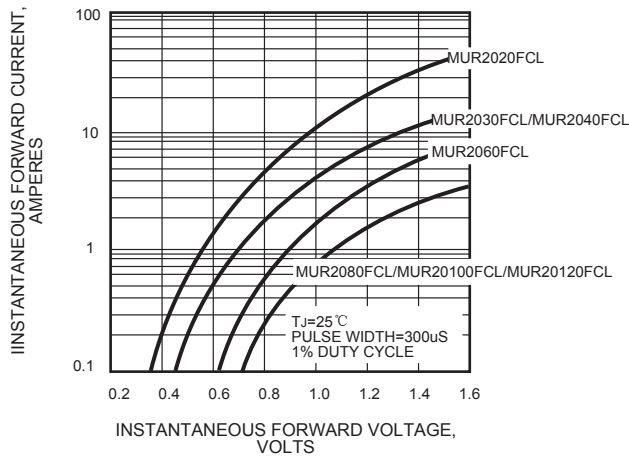


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

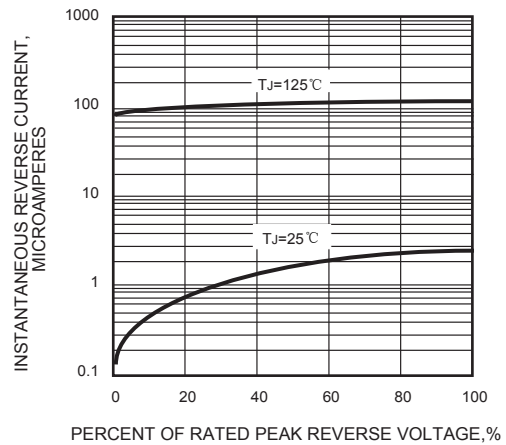


FIG.5 - TYPICAL JUNCTION CAPACITANCE

