

Pb Free Plating Product

MUR2020PL thru MUR20120PL



20.0 Ampere Heatsink Dual Series Connection Ultra Fast Recovery Rectifiers

Features ※ ThinkSemi latest&matured process FRD/FRED ※ Low forward voltage drop ※ High current capability ※ Low reverse leakage current ※ High surge current capability Application ※ Automotive Inverters and Solar Inverters ※ Car Audio Amplifiers and Sound Device Systems ※ Plating Power Supply, Motor Control, UPS and SMPS etc. Mechanical Data ※ Case: Heatsink open metal TO-3P(TO-3PN/TO-3PB) package ※ Epoxy: UL 94V-0 rate flame retardant ※ Terminals: Solderable per MIL-STD-202 method 208 ※ Polarity: As marked on diode body ※ Mounting position: Any ※ Weight: 6.5 gram approximately	TO-3P(TO-3PN-SQ) Unit: inch(mm) ① ② ③ Case Positive Common Cathode Suffix "PT" ① ② ③ Case Negative Common Anode Suffix "PA" ① ② ③ Case Doubler Doubler Polarity Suffix "PR" ① ② ③ Case Series Series Connection Suffix "PL"
---	---

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	MUR2020PL	MUR2030PL MUR2040PL	MUR2060PL	MUR2080PL	MUR20100PL	MUR20120PL	UNIT	
Maximum Recurrent Peak Reverse Voltage	VRRM	200	400	600	800	1000	1200	V	
Maximum RMS Voltage	VRMS	140	280	420	560	700	840	V	
Maximum DC Blocking Voltage	VDC	200	400	600	800	1000	1200	V	
Maximum Average Forward Rectified Current TC=125℃ (Total Device 2x10.0A=20.0A)	IF(AV)	20.0						A	
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)(Per Diode/Per Leg)	IFSM	200						A	
Maximum Instantaneous Forward Voltage @10.0A(Per Diode/Per Leg)	VF (Typical)	0.90-1.10	1.10-1.40	1.40-1.80	1.40-1.80			V	
Maximum DC Reverse Current @TJ=25℃ At Rated DC Blocking Voltage @TJ=125℃	IR	5.0 500			μA μA				
Maximum Reverse Recovery Time (Note1)	Trr	35-50			50-75				nS
Typical Junction Capacitance (Note 2)	CJ	100			pF				
Typical Thermal Resistance (Note 3)	RθJC	0.75			℃/W				
Operating Junction and Storage Temperature Range	TJ,TSTG	-55 to +175			℃				

Note:(1)Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.

Note:(2)Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

Note:(3)Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

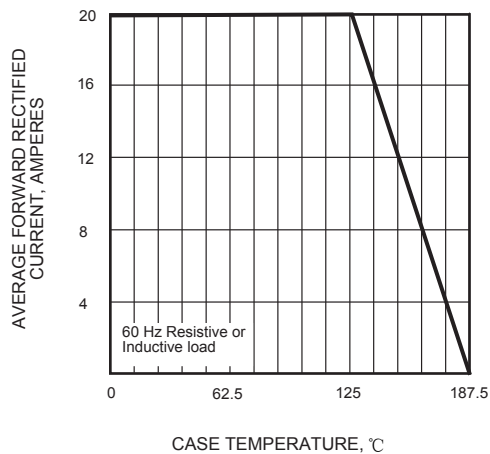


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

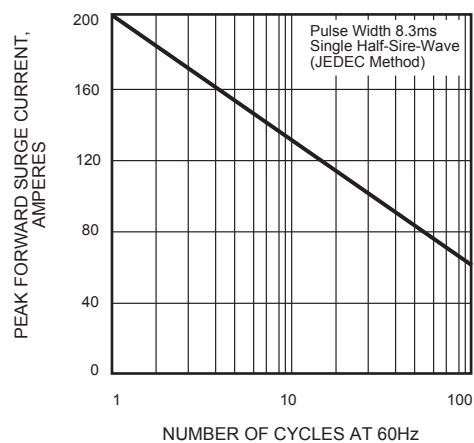


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

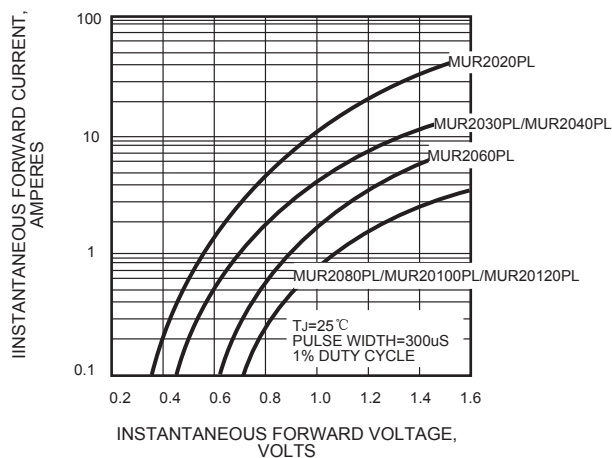


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

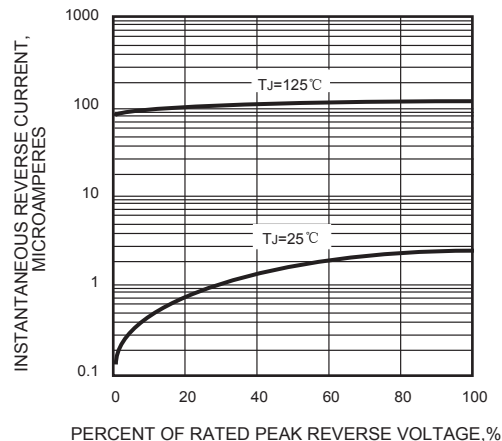


FIG.5 - TYPICAL JUNCTION CAPACITANCE

