


Pb Free Plating Product

## TURF2020CTG thru TURF20120CTG

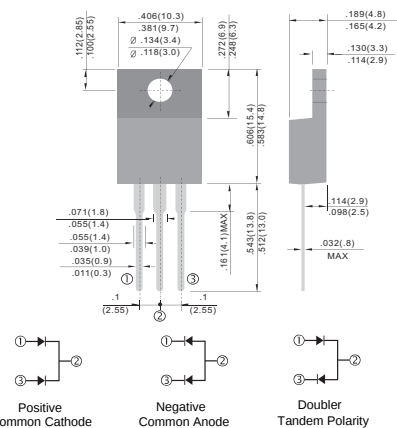

20.0 Ampere Insulated Dual Common Cathode Ultra Fast Recovery Rectifiers

| Features                                                                                                                                                                                                                                                                                                                                                                  | ITO-220AB/TO-220F-3L                                                                | Unit:inch(mm) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| <ul style="list-style-type: none"> <li>※ ThinkSemi latest&amp;matured process FRD/FRED</li> <li>※ Low forward voltage drop</li> <li>※ High current capability</li> <li>※ Low reverse leakage current</li> <li>※ High surge current capability</li> </ul>                                                                                                                  |  |               |
| <b>Application</b> <ul style="list-style-type: none"> <li>※ Automotive Inverters and Solar Inverters</li> <li>※ Car Audio Amplifiers and Sound Device Systems</li> <li>※ Plating Power Supply, Motor Control, UPS and SMPS etc.</li> </ul>                                                                                                                                |                                                                                     |               |
| <b>Mechanical Data</b> <ul style="list-style-type: none"> <li>※ Case: Isolated fully plastic ITO-220AB/TO-220F-3L package</li> <li>※ Epoxy: UL 94V-0 rate flame retardant</li> <li>※ Terminals: Solderable per MIL-STD-202 method 208</li> <li>※ Polarity: As marked on diode body</li> <li>※ Mounting position: Any</li> <li>※ Weight: 2.0 gram approximately</li> </ul> |                                                                                     |               |

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| PARAMETER                                                                                                            | SYMBOL          | TURF2020CTG | TURF2040CTG | TURF2060CTG | TURF2080CTG | TURF20100CTG | TURF20120CTG | UNIT |
|----------------------------------------------------------------------------------------------------------------------|-----------------|-------------|-------------|-------------|-------------|--------------|--------------|------|
| Maximum Recurrent Peak Reverse Voltage                                                                               | VRRM            | 200         | 400         | 600         | 800         | 1000         | 1200         | V    |
| Maximum RMS Voltage                                                                                                  | VRMS            | 140         | 280         | 420         | 560         | 700          | 840          | V    |
| Maximum DC Blocking Voltage                                                                                          | VDC             | 200         | 400         | 600         | 800         | 1000         | 1200         | V    |
| Maximum Average Forward Rectified Current TC=125℃<br>(Total Device 2x10.0A=20.0A)                                    | IF(AV)          | 20.0        |             |             |             |              |              | A    |
| Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)(Per Diode/Per Leg) | IFSM            | 200         |             |             |             |              |              | A    |
| Maximum Instantaneous Forward Voltage @10.0A(Per Diode/Per Leg)                                                      | VF<br>(Typical) | 0.85-0.95   | 1.00-1.25   | 1.25-1.50   | 1.50-1.70   |              |              | V    |
| Maximum DC Reverse Current @TJ=25℃<br>At Rated DC Blocking Voltage @TJ=125℃                                          | IR              | 1.0<br>100  |             |             |             | μA<br>μA     |              |      |
| Maximum Reverse Recovery Time (Note1)                                                                                | Trr             | 25-50       |             |             | 50-75       |              |              | nS   |
| Typical Junction Capacitance (Note 2)                                                                                | CJ              | 100         |             |             |             |              |              | pF   |
| Typical Thermal Resistance (Note 3)                                                                                  | RθJC            | 3.0         |             |             |             |              |              | ℃/W  |
| Operating Junction and Storage Temperature Range                                                                     | TJ,TSTG         | -55 to +175 |             |             |             |              |              | ℃    |

Note:(1)Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.

Note:(2)Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

Note:(3)Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

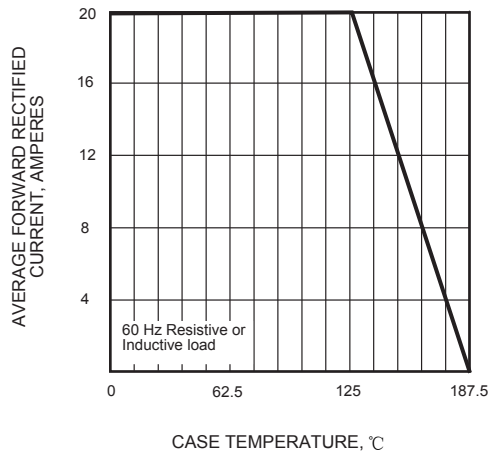


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

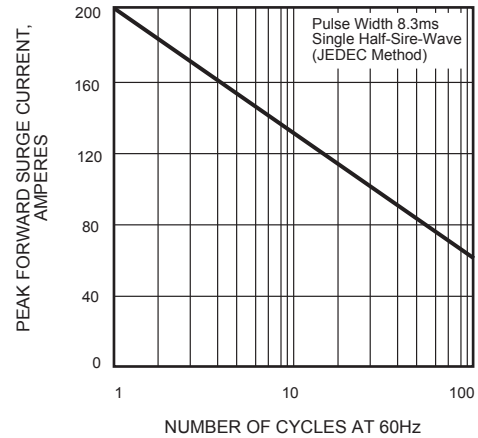


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

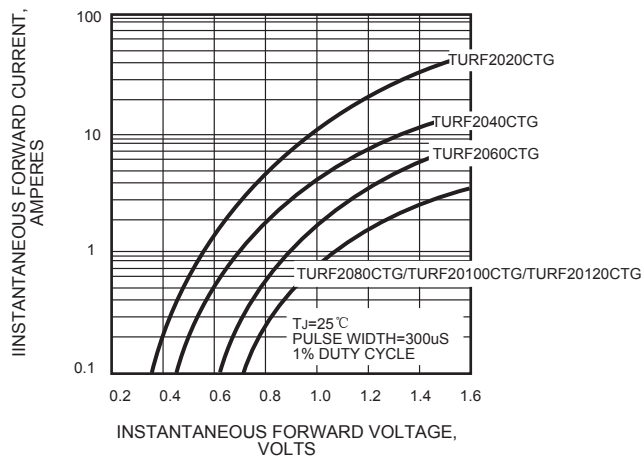


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

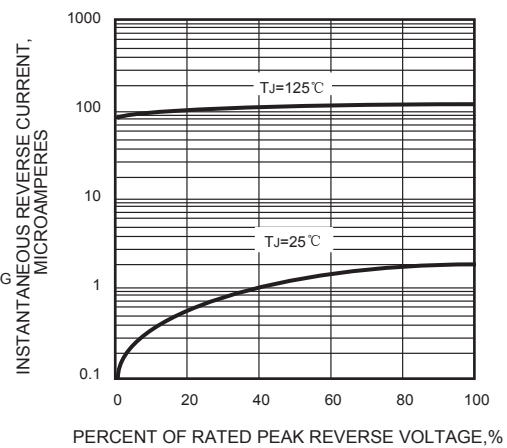


FIG.5 - TYPICAL JUNCTION CAPACITANCE

