

Pb Free Plating Product

2CR082 thru 2CR0812



8.0 Ampere Heatsink Single Positive Type Ultra Fast Recovery Rectifier Diode

<p>Features</p> <ul style="list-style-type: none"> ThinkiSemi latest&matured process FRED/FRD Low forward voltage drop High current capability Low reverse leakage current High surge current capability <p>Application</p> <ul style="list-style-type: none"> Automotive Inverters and Solar Inverters Car Audio Amplifiers and Sound Device Systems Plating Power Supply, Motor Control, UPS and SMPS etc. <p>Mechanical Data</p> <ul style="list-style-type: none"> Case: TO-220AC(TO-220-2L) with heat sink package Epoxy: UL 94V-0 rate flame retardant Terminals: Solderable per MIL-STD-202 method 208 Polarity: As marked on diode body Mounting position: Any Weight: 2.2 gram approximately 	<p>TO-220AC(TO-220-2L) Unit:inch(mm)</p> <p>Internal Configuration</p> <p>② Base Backside</p> <p>Positive Type</p> <p>Negative Type</p>
--	---

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	2CR082	2CR084	2CR086	2CR088	2CR0810	2CR0812	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	200	400	600	800	1000	1200	V
Maximum RMS Voltage	VRMS	140	280	420	560	700	840	V
Maximum DC Blocking Voltage	VDC	200	400	600	800	1000	1200	V
Maximum Average Forward Rectified Current TC=125°C (Total Device 8.0A)	IF(AV)	8.0						A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)(Per Diode/Per Leg)	IFSM	160						A
Maximum Instantaneous Forward Voltage @8.0A(Per Diode/Per Leg)	VF (Typical)	0.85-0.95	1.00-1.25	1.25-1.50	1.50-1.70			V
Maximum DC Reverse Current @TJ=25°C At Rated DC Blocking Voltage @TJ=125°C	IR	1.0 100						µA µA
Maximum Reverse Recovery Time (Note1)	Trr	15-25			25-35			nS
Typical Junction Capacitance (Note 2)	CJ	80						pF
Typical Thermal Resistance (Note 3)	RθJC	1.5						°C/W
Operating Junction and Storage Temperature Range	TJ,TSTG	-55 to +175						°C

Note:(1)Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.
 Note:(2)Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.
 Note:(3)Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

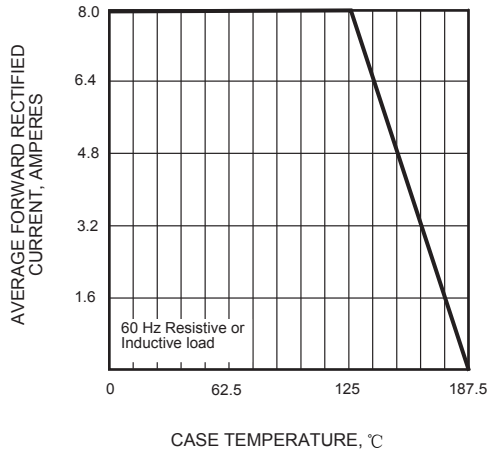


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

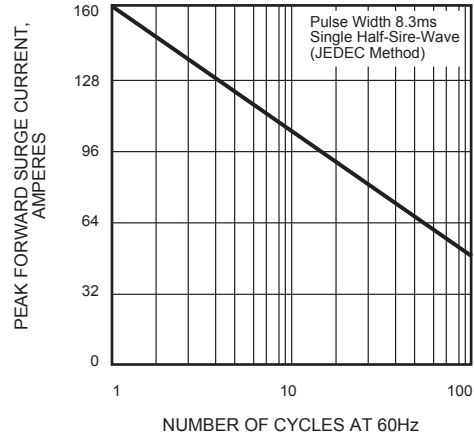


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

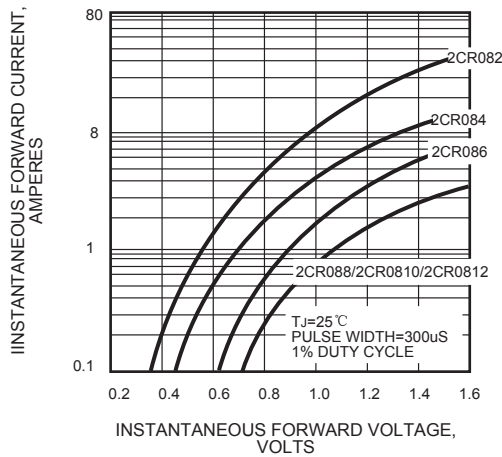


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

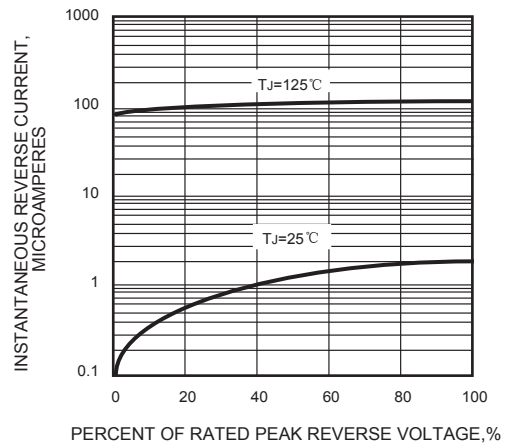


FIG.5 - TYPICAL JUNCTION CAPACITANCE

