



Pb Free Plating Product

MURR1620FCT thru MURR16120FCT

16.0 Ampere Insulated Dual Doubler Polarity Ultra Fast Recovery Rectifiers

|  |  |
|--|--|
| <p><b>Features</b></p> <ul style="list-style-type: none"> <li>ThinkSemi latest&amp;matured process FRD/FRED</li> <li>Low forward voltage drop</li> <li>High current capability</li> <li>Low reverse leakage current</li> <li>High surge current capability</li> </ul> <p><b>Application</b></p> <ul style="list-style-type: none"> <li>Automotive Inverters and Solar Inverters</li> <li>Car Audio Amplifiers and Sound Device Systems</li> <li>Plating Power Supply, Motor Control, UPS and SMPS etc.</li> </ul> <p><b>Mechanical Data</b></p> <ul style="list-style-type: none"> <li>Case: Isolated fully plastic ITO-220AB/TO-220F-3L package</li> <li>Epoxy: UL 94V-0 rate flame retardant</li> <li>Terminals: Solderable per MIL-STD-202 method 208</li> <li>Polarity: As marked on diode body</li> <li>Mounting position: Any</li> <li>Weight: 2.0 gram approximately</li> </ul> | <p>ITO-220AB/TO-220F-3L <span style="float: right;">Unit: inch(mm)</span></p> <p>① → ② → Case<br/>③ → ④ → Case</p> <p>① → ② → Case<br/>③ → ④ → Case</p> <p>① → ② → Case<br/>③ → ④ → Case</p> <p>① → ② → Case<br/>③ → ④ → Case</p> <p>Positive Common Cathode Prefix "MUR"</p> <p>Negative Common Anode Prefix "MURA"</p> <p>Doubler Prefix "MURR"</p> <p>Series Connection Prefix "MURL"</p> |
|--|--|

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| PARAMETER  | SYMBOL       | MURR1620FCT | MURR1630FCT<br>MURR1640FCT | MURR1660FCT | MURR1680FCT | MURR16100FCT | MURR16120FCT | UNIT     |
|--|--------------|-------------|----------------------------|-------------|-------------|--------------|--------------|----------|
| Maximum Recurrent Peak Reverse Voltage   | VRRM         | 200         | 400                        | 600         | 800         | 1000         | 1200         | V        |
| Maximum RMS Voltage  | VRMS         | 140         | 280                        | 420         | 560         | 700          | 840          | V        |
| Maximum DC Blocking Voltage  | VDC          | 200         | 400                        | 600         | 800         | 1000         | 1200         | V        |
| Maximum Average Forward Rectified Current TC=125°C (Total Device 2x8.0A=16.0A)                                       | IF(AV)       | 16.0        |                            |             |             |              |              | A        |
| Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)(Per Diode/Per Leg) | IFSM         | 160         |                            |             |             |              |              | A        |
| Maximum Instantaneous Forward Voltage @8.0A(Per Diode/Per Leg)   | VF (Typical) | 0.90-1.10   | 1.10-1.40                  | 1.40-1.80   | 1.40-1.80   |              |              | V        |
| Maximum DC Reverse Current @TJ=25°C At Rated DC Blocking Voltage @TJ=125°C   | IR           | 5.0<br>500  |                            |             |             |              |              | µA<br>µA |
| Maximum Reverse Recovery Time (Note1)  | Trr          | 35-50       |                            |             | 50-75       |              |              | nS       |
| Typical Junction Capacitance (Note 2)  | CJ           | 80          |                            |             |             |              |              | pF       |
| Typical Thermal Resistance (Note 3)  | RθJC         | 3.0         |                            |             |             |              |              | °C/W     |
| Operating Junction and Storage Temperature Range   | TJ,TSTG      | -55 to +175 |                            |             |             |              |              | °C       |

Note:(1)Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.  
Note:(2)Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.  
Note:(3)Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

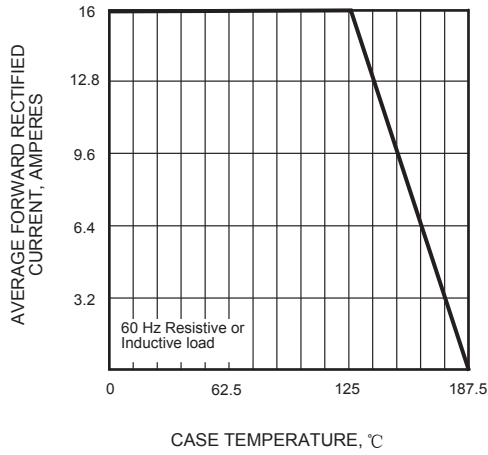


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

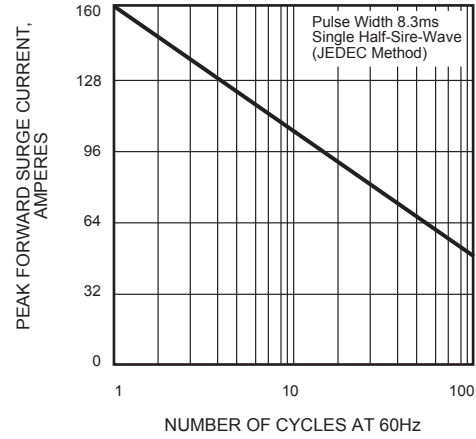


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

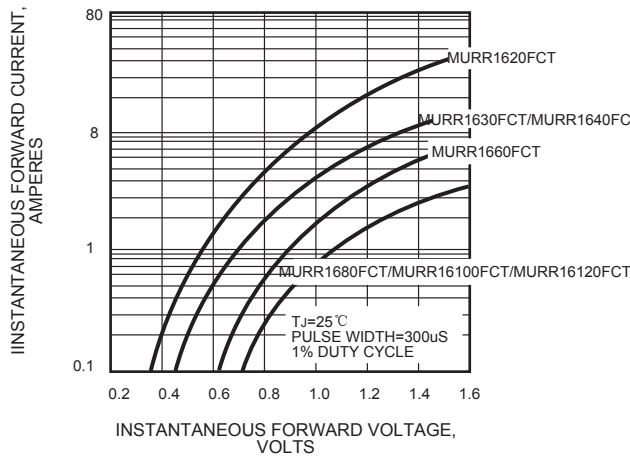


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

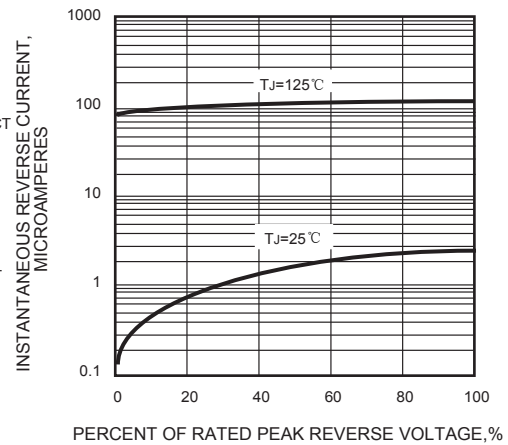


FIG.5 - TYPICAL JUNCTION CAPACITANCE

